



Compatibilizer

KT-20 and KT-20A products are terpolymers of ethylene-acrylate-glycidyl methacrylate, which can be used as the compatibilizer for polycarbonate/polybutylene terephthalate alloy (PC/PBT alloy), polyamide/polyethylene terephthalate alloy (PA/PET alloy). It can also be used to toughen and strengthen PC, PBT, PET, PPS.

Product Specification

Product No.	Melt Flow Rate(MFR) (190°C, 2.16kg, g/10min)	Grafted Rate(%)	Density(g/m ³)	Substrate	Color
KT-20	4.0 - 8.0	Very High	0.94-0.98	Elastomer	White
KT-20A	6.0 - 10.0	Very High	0.94-0.98	Elastomer	White

Performance Comparison

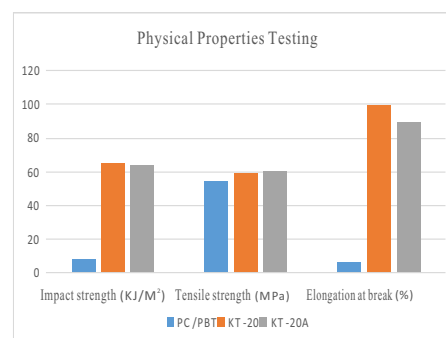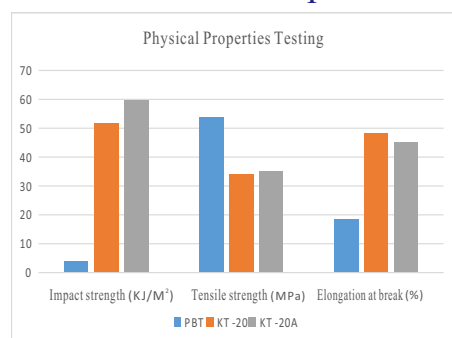

Product Photo(KT-20, KT-20A Pellets)



Dosage

The proportion of products increases or decreases by 3%-5% properly according to performance requirement and cost balance. Just for toughening PBT, adjusting the proportion is based on the performance requirement.

Packing, Storage And Transportation

The product is packed in 25Kg kraft paper bag lined with a plastic bag.

According to the requirement of non-dangerous goods, it is stored and transported under dry conditions to avoid sunlight and rain.