



Compatibilizer

Compatibilizer KT-24 is the copolymer of maleic anhydride grafted polyphenylene oxide (abbreviated herein as MAH-g-PPO), which is used as the compatibilizer of the blend alloy of polyamide (PA) and PPO.

Product Specification

Product No.	Melt Flow Rate(MFR) (280°C, 2.16kg,g/10min)	Grafted Rate(%)	Density(g/m ³)	Substrate	Color
KT-24	2.0 - 4.0	High	1.00-1.04	PPO	Yellow or Brown

Performance Comparison

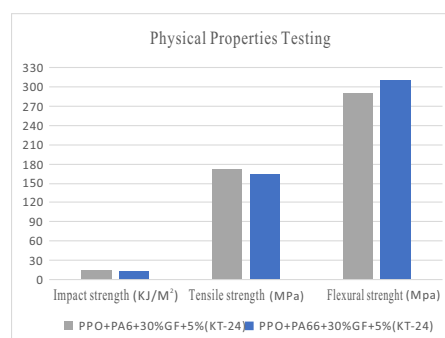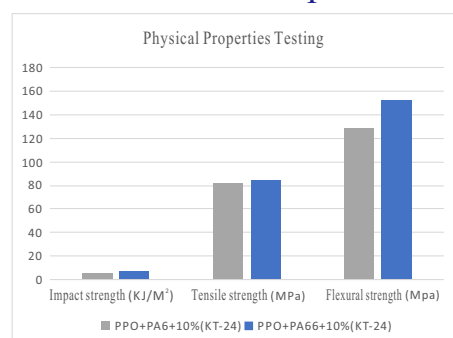

Product Photo(KT-24 Pellets)



Dosage

The proportion of products increases or decreases by 5%-10% properly according to performance requirement and cost balance.

Packing, Storage And Transportation

The product is packed in 25Kg kraft paper bag lined with a plastic bag.

According to the requirement of non-dangerous goods, it is stored and transported under dry conditions to avoid sunlight and rain.