



Compatibilizer

KT-30 and KT-30A are copolymers of glycidyl methacrylate grafted polyethylene, which are used to improve the toughness and the strength of polybutylene terephthalate (abbreviated herein as PBT) and PBT with the retardant in it.

Product Specification

Product No.	Melt Flow Rate(MFR) (190℃,2.16kg,g/10min)	Grafted Rate(%)	Density(g/m ³)	Substrate	Color
KT-30	4.5 - 7.5	High	0.92-0.96	Elastomer	White
KT-30A	4.0 - 8.0	High	0.92-0.96	Elastomer	White

Performance Comparison

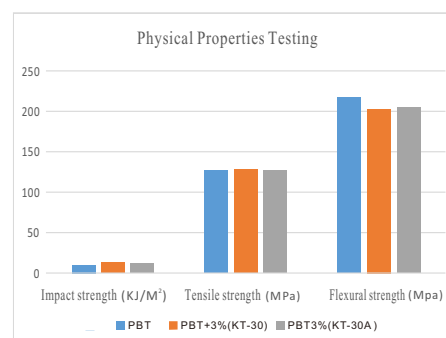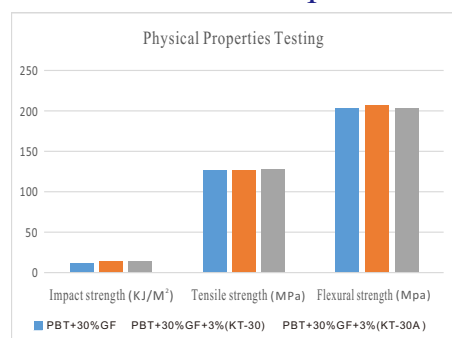

Product Photo(KT-30, KT-30A Pellets)



Dosage

The proportion of products increases or decreases by 3%-5% properly according to performance requirement and cost balance.

Packing, Storage And Transportation

The product is packed in 25Kg kraft paper bag lined with a plastic bag.

According to the requirement of non-dangerous goods, it is stored and transported under dry conditions to avoid sunlight and rain.