


Flexibilizer

Flexibilizer KT-15, KT-17, KT-18, KT-18A are mainly used for toughening different alloys including polycarbonate alloy (abbreviated herein as PC alloy), polycarbonate/acrylonitrile butadiene styrene alloy(PC/ABS alloy), polybutylene terephthalate/ABS alloy(PET/ABS alloy), and for improving impact strength and environmental stress cracking resistance.

Product Specification

Product No.	Grafted Rate(%)	Density(g/m ³)	Substrate	Color
KT-15	High	-----	Elastomer	White
KT-17	High	1.00- 1.05	Elastomer	Light Yellow
KT-18	-----	-----	MBS	White
KT-18A	-----	-----	MBS	White

Performance Comparison

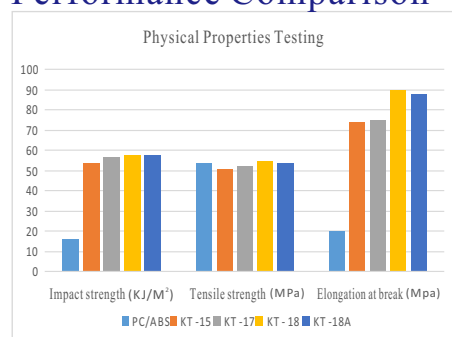

Product Photo(KT-15, KT-18, KT-18A Powder, KT-17 Pellets)



KT-17

Dosage

3% ~ 10%, The proportion of products increases or decreases properly according to the performance requirement and cost balance.

Packing, Storage And Transportation

The KT-15 product is packed in 20Kg kraft paper bag lined with a plastic bag, KT-17, KT-18,KT-18A all in 25kg bag. According to the requirement of non-dangerous goods, it is stored and transported under dry conditions to avoid sunlight and rain.