


Flexibilizer

Toughening agent KT-28A for the injection molding is the acrylates elastomer, which is used for improving the toughness and the strength of polyoxymethylene (POM). Its performance is better than thermoplastic polyurethanes (TPU), and its liquidity is strong, the impact performance high.

Product Specification

Product No.	Melt Flow Rate(MFR) (190°C,2.16kg,g/10min)	Grafted Rate(%)	Density(g/m ³)	Substrate	Color
KT-28A	-----	-----	1.12-1.17	Elastomer	Translucent

Performance Comparison

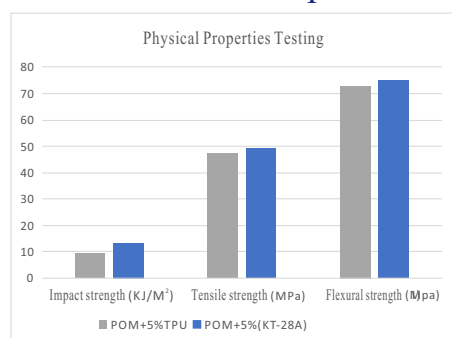

Product Photo(KT-28A Pellets)



Dosage

The proportion of products increases or decreases by 5%-10% properly according to performance requirement and cost balance.

Packing, Storage And Transportation

The product is packed in 25Kg kraft paper bag lined with a plastic bag. According to the requirement of non-dangerous goods, it is stored and transported under dry conditions to avoid sunlight and rain.