


Flexibilizer

Toughener KT-906 is maleic anhydride grafted polyolefin elastomer, which is mainly used for improving the properties of toughness and strength for PA6, PA66, Flame retardant. It can improve nylon impact, formation, processability, and reduce the absorption water rate.

Product Specification

Product No.	Melt Flow Rate(MFR) (190°C, 2.16kg, g/10min)	Grafted Rate(%)	Density(g/m ³)	Substrate	Color
KT-906	0.2 - 0.6	Medium	0.86-0.90	POE	White or Light Yellow

Performance Parameter

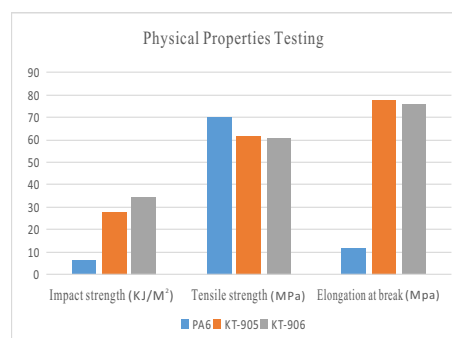

Product Photo(KT-906 Pellet)



Dosage

The proportion of the product is almost 3%-5% for toughening and strengthening PA6 and PA66. Adding 5%-25% of it increases or decreases properly to toughen PA6 or PA66 according to the performance requirement and the balance cost.

Packing, Storage And Transportation

The product is packed in 25Kg kraft paper bag lined with a plastic bag. According to the requirement of non-dangerous goods, it is stored and transported under dry conditions to avoid sunlight and rain.